























Note: The illustration shows the maximum possible range of equipment.

| | | | | | | | | | |
|---|--|---|---------------------------------|---|---|--|----------------------------------|---|-------------------------------------|
|  | Airbag |  | Stored gas inflator |  | Seat belt pretensioner |  | SRS control unit |  | Pedestrian protection active system |
|  | Automatic rollover protection system |  | Gas strut / Preloaded spring |  | High strength zone |  | Zone requiring special attention | | |
|  | Battery low voltage |  | Ultra capacitor Low voltage |  | Fuel tank |  | Gas tank |  | Safety valve |
|  | Battery pack, high-voltage |  | High voltage power cable |  | High voltage device that disconnects high voltage |  | Fuse box disabling high voltage |  | High voltage ultra-capacitor |
|  | Low voltage device that disconnects high voltage |  | Fuse box disabling high voltage |  | High voltage component | | | | |

| Brand | Type | Step | Year of market launch | Internal reference | Creation date | Edition | Version no. | Page |
|-------|------|------|-----------------------|--------------------|---------------|------------|-------------|--------|
| CUPRA | Born | 1 | 2021 | VSS-K110E50 | 10/08/2021 | 10/08/2021 | 1 | 1 of 4 |



1. Identification / recognition



The electric motor is noiseless. The display in the combi instrument (power meter) gives feedback as to whether the electric motor is switched off “OFF” or enabled for operation “READY”.

Lettering



Charging connection



Motor compartment




2. Immobilisation / stabilisation / lifting

Immobilising the vehicle

Actuate electrical parking brake.



Lifting points

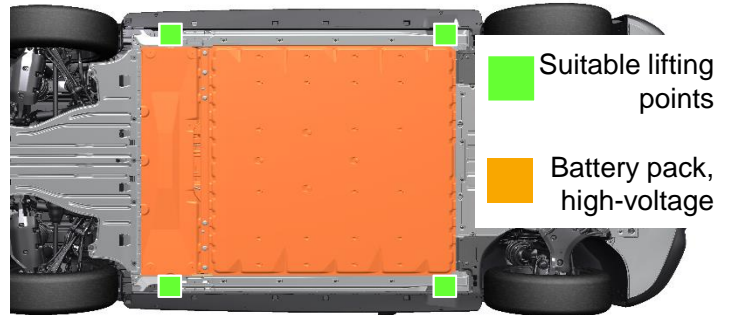

3. Disable direct hazards / safety regulations

Switch off the ignition (power meter display “OFF”)



A code card or a smartphone app may be used instead of a remote control key.


Deactivate high voltage system

Option 1: from the motor compartment



Disconnect the 12 volt battery

Disconnect the negative pole from the body contact point.

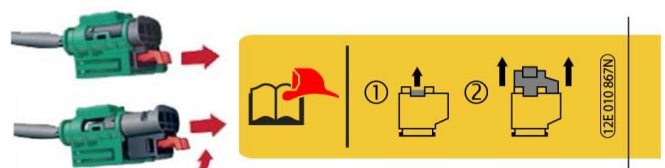

| Brand | Type | Step | Year of market launch | Internal reference | Creation date | Edition | Version no. | Page |
|-------|------|------|-----------------------|--------------------|---------------|------------|-------------|--------|
| CUPRA | Born | 1 | 2021 | VSS-K110E50 | 10/08/2021 | 10/08/2021 | 1 | 2 of 4 |




Option 2: from the passenger compartment




Left hand drive:



Right hand drive:

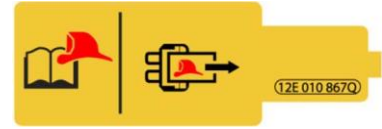


Option 3: from the tailgate area

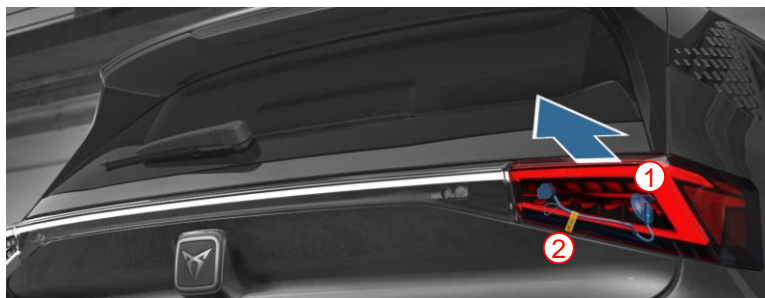


Do not touch, cut or open high-voltage components and high-voltage batteries!
Wear appropriate protective equipment!

In the event of accidents in which the airbag is deployed, the high-voltage system is automatically deactivated. The high-voltage system is voltage-free approx. 20 seconds after deactivation.

Disconnect from the charging station (emergency release)

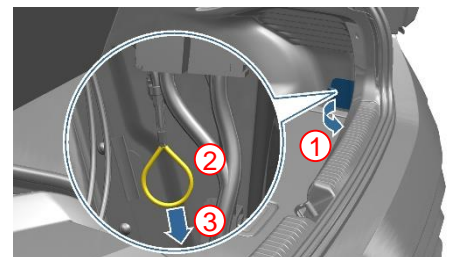

4. Access to the occupants

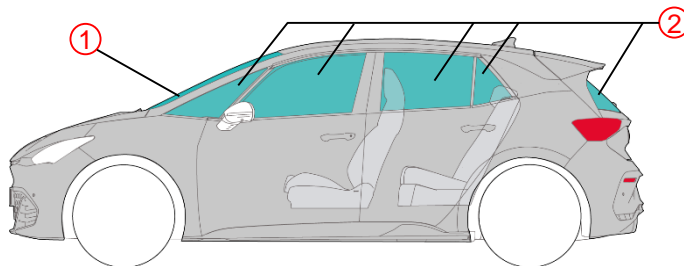

Glass type:

- ① Laminated glass
- ② Single-pane safety glass

5. Stored energy / liquids / gases / solids



LI ION




400 V

| Brand | Type | Step | Year of market launch | Internal reference | Creation date | Edition | Version no. | Page |
|-------|------|------|-----------------------|--------------------|---------------|------------|-------------|--------|
| CUPRA | Born | 1 | 2021 | VSS-K110E50 | 10/08/2021 | 10/08/2021 | 1 | 3 of 4 |




| | | | | | | |
|--|---|---|---|---|---|-------------|
|  |  |  |  |  |  | <p>12 V</p> |
|--|---|---|---|---|---|-------------|

 If coolant escapes from the battery cooling system, there is a risk of a thermal reaction in the high-voltage battery. Monitor the temperature of the high-voltage battery!



6. In case of fire





 Lithium-ion batteries can self-ignite or re-ignite after the fire has been extinguished. Wear appropriate protective equipment!




7. In case of submersion

After salvaging the vehicle from water, deactivate the high-voltage system (see Chapter 3) and allow the water to drain off. Wear appropriate protective equipment!

8. Towing / transportation / storage

| | | |
|---|---|--|
| ✓ |  | <ul style="list-style-type: none"> - Do not tow the salvaged vehicle using the drive axle. - Deactivate high-voltage system (see Chapter 3). - Park the vehicle at a safe distance from buildings and other vehicles (min. 5 m). [Quarantine area]. |
| ✗ |  | |


 Lithium-ion batteries can self-ignite or re-ignite after the fire has been extinguished. Wear appropriate protective equipment!



9. Important additional information

The vehicle does not have a towing eye at the rear of the vehicle.

10. Explanation of pictograms used

| | | | | | | |
|---|---|--|--|--|--|---|
|  <p>Flammable</p> |  <p>Explosive</p> |  <p>Corrosive</p> |  <p>Hazardous to the human health</p> |  <p>Environmental hazard</p> |  <p>Electric Vehicle</p> |  <p>Warning, Electricity</p> |
|  <p>General warning sign</p> |  <p>Use water to extinguish the fire</p> | <p>LI ION</p> <p>Lithium-ion battery</p> |  <p>Dangerous voltage</p> |  <p>Remove smart key</p> |  <p>Use thermal infrared camera</p> | |

| Brand | Type | Step | Year of market launch | Internal reference | Creation date | Edition | Version no. | Page |
|-------|------|------|-----------------------|--------------------|---------------|------------|-------------|--------|
| CUPRA | Born | 1 | 2021 | VSS-K110E50 | 10/08/2021 | 10/08/2021 | 1 | 4 of 4 |